



USE FASTENER GRADES SPECIFIED

USE STRAIGHT EDGE OVER HOOK AND BUMPER MOUNT FACES. IF HOOK PROTRUDES FORWARD OF MOUNT FACES, INSTALL WASHERS ON MOUNT BOLTS, BETWEEN BUMPER AND TRUCK

DRILL AND INSTALL ADDITIONAL 1/2" GR.8 BOLTS NUTS AND WASHERS (NOT SUPPLIED) FOR IMPROVED TOWING CONNECTION (HIWAY)

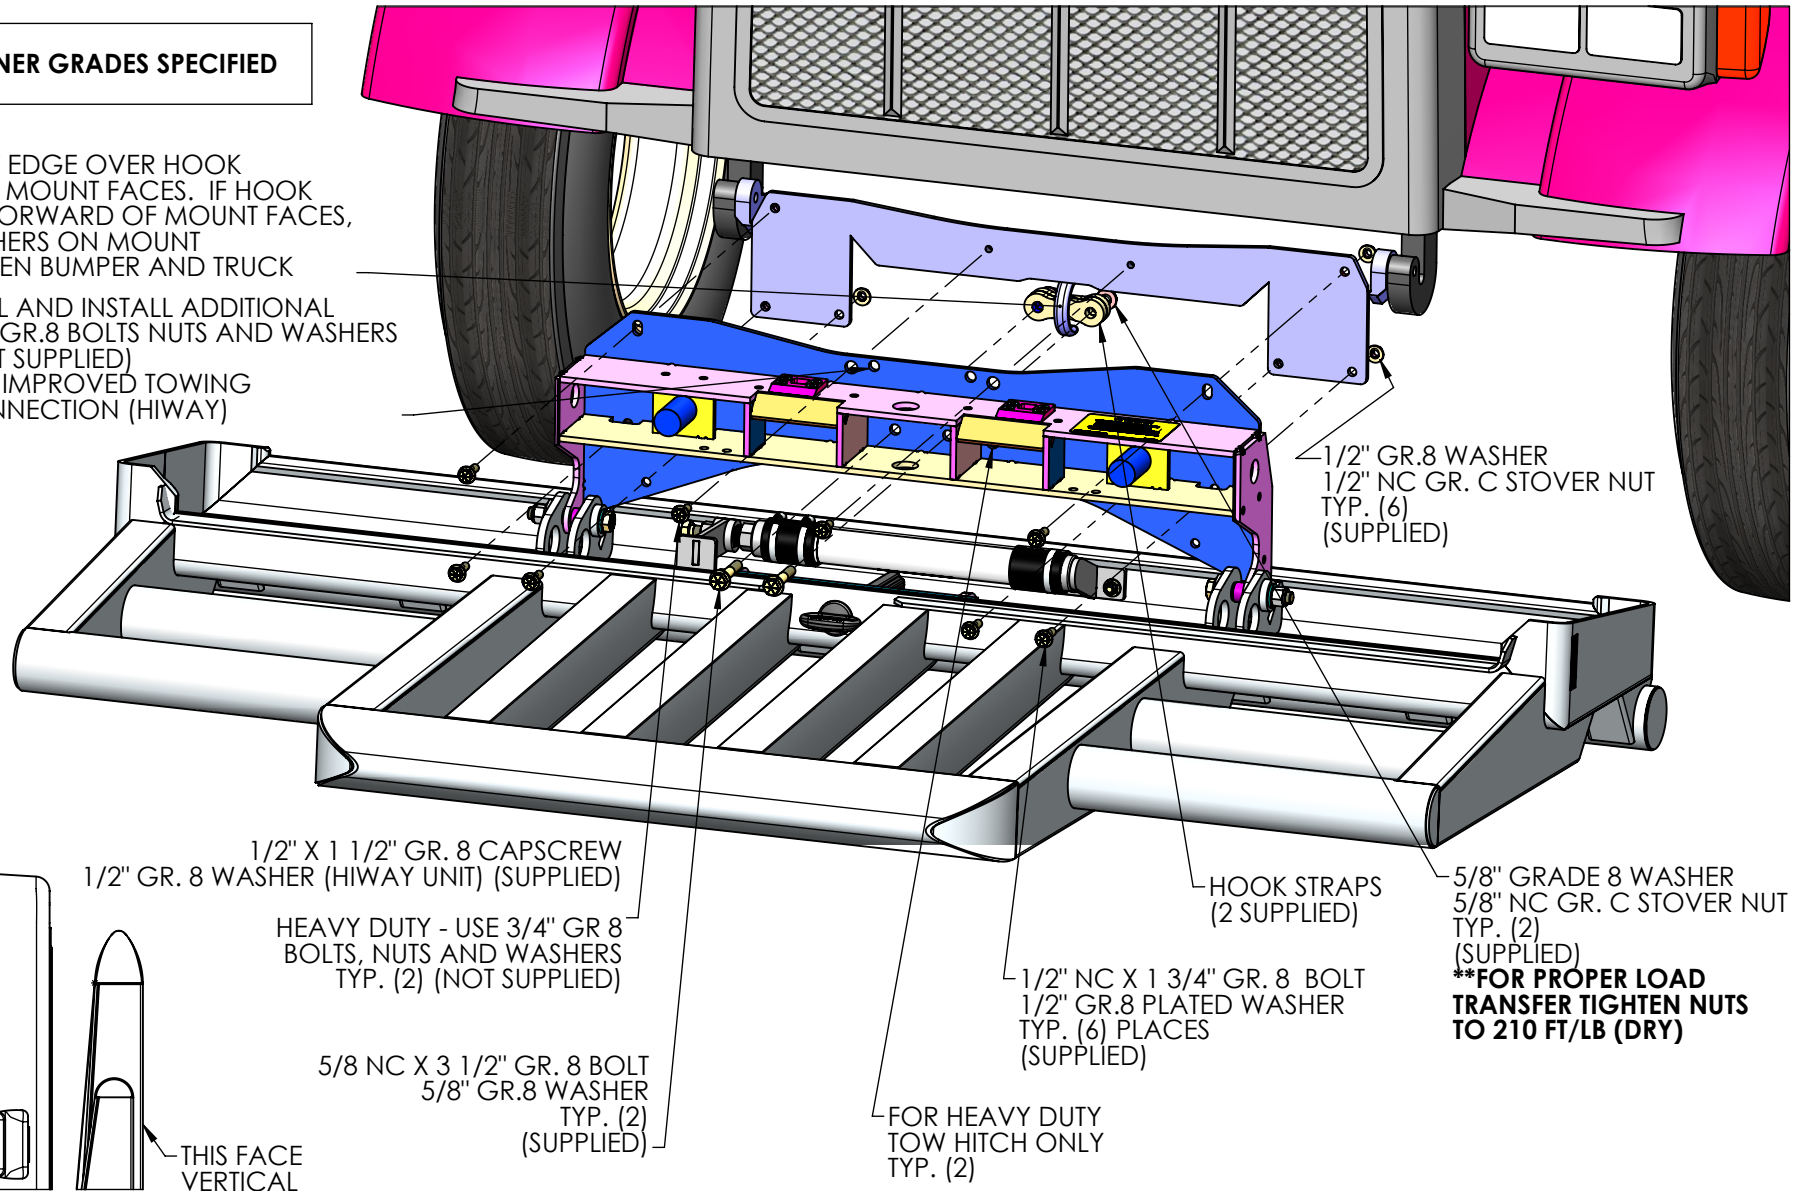

1/2" X 1 1/2" GR. 8 CAPSCREW
1/2" GR. 8 WASHER (HIWAY UNIT) (SUPPLIED)

HEAVY DUTY - USE 3/4" GR 8
BOLTS, NUTS AND WASHERS
TYP. (2) (NOT SUPPLIED)

5/8 NC X 3 1/2" GR. 8 BOLT
5/8" GR.8 WASHER
TYP. (2)
(SUPPLIED)

THIS FACE
VERTICAL

HOOK STRAPS
(2 SUPPLIED)

1/2" NC X 1 3/4" GR. 8 BOLT
1/2" GR.8 PLATED WASHER
TYP. (6) PLACES
(SUPPLIED)

FOR HEAVY DUTY
TOW HITCH ONLY
TYP. (2)

1/2" GR.8 WASHER
1/2" NC GR. C STOVER NUT
TYP. (6)
(SUPPLIED)

5/8" GRADE 8 WASHER
5/8" NC GR. C STOVER NUT
TYP. (2)
(SUPPLIED)

****FOR PROPER LOAD
TRANSFER TIGHTEN NUTS
TO 210 FT/LB (DRY)**

**MAGNUM TRAILER
&
EQUIPMENT INC.**

MAGNUM

FRACTIONS CHART

1/32	.03125	9/32	.28125	17/32	.53125	25/32	.78125
1/16	.0625	5/16	.3125	9/16	.5625	13/16	.8125
3/32	.09375	11/32	.34375	19/32	.59375	27/32	.84375
1/8	.125	3/8	.375	5/8	.625	7/8	.875
5/32	.15625	13/32	.40625	21/32	.65625	29/32	.90625
3/16	.1875	7/16	.4375	11/16	.6875	15/16	.9375
7/32	.21875	15/32	.46875	23/32	.71875	31/32	.96875
1/4	.25	1/2	.5	3/4	.75		

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

FRACTIONS	ANGLES
+/- 1/16"	+/- 1°
.XX"	.XXX"
+/- 0.03"	+/- 0.005"

DIMENSIONS TO SHARP POINTS

SHEET NAME
INSTALL

CURRENT CUSTOMER

WO#

SCALE

1:12

TITLE

17195 BUMPER ON 2004 PETERBILT 379 SFA

STOCK NUMBER

VENDOR NUMBER

WEIGHT - LB.

422

DRAWN BY

DRAWN DATE

CHECKED BY

CHECKED DATE

REV.

BNS

5/26/2015

LS

5/27/2021

B

MODELLER

DRAWING NUMBER

AA-39885

NUMBER OF SHEETS

1